

## Tractor / Trailer Connectors, Coiled Cables & Accessories

### Die Cast Liftgate

#### 1-Way & 2-Way Heavy Duty

- Rated: 300 amps
- Zinc die cast body is corrosion resistant
- Accepts 2-4ga. cable



Description	Part Number	
	1-Way	2-Way
Receptacle	TS-SPS	TS-DPS
Plug	TS-SPP	TS-DPP

Pins in these 2-way connectors are located in the 3 & 9 o'clock positions.

#### 1-Way & 2-Way Coils

- For liftgate & remote battery applications
- Cable ends include terminal lugs for a return ground cable
- 200 amp max capacity
- Temp rating: -40°F to 140°F




Part Number	Work Length	Cables
LGC-15	15ft.	One 4ga.
LGC-15-DP	15ft.	Two 4ga.

### 4-Way Die Cast

#### Heavy Duty

- Rated: 12-24 volt; 35 amp
- Zinc die cast body w/ engineering grade plastic insert & split brass contacts

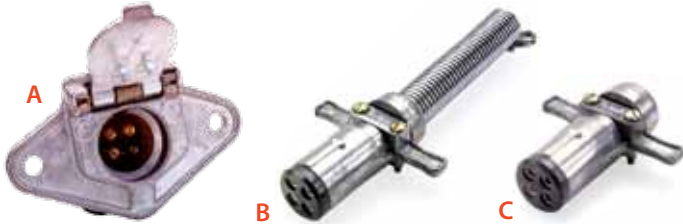

Description	Part Number				Fig.
	Cole Hersee	Phillips	Pollak	Tramec	
Receptacle	CH-1232	15-400	11-404	38494	A
Plug w/ spring	CH-1253	15-430	11-403	N/A	B
Plug	CH-1233	15-410	11-402	38194	C

Wire Code for 4-Way Connectors		
Number Code	Color	Circuits
1	White	Ground return
2	Green	Right turn & brake lts
3	Red/Yellow	Left turn & brake lts
4	Brown	Tail lights

*Number code: Connect the correct wire to the corresponding number on the receptacle and the plug. If your insert has letters instead of numbers, just match the number to the corresponding letter of the alphabet, i.e. A = 1, B = 2, etc.*

#### Chrome Plated

- Rated: 12-24 volt; 20 amp, polarized
- Chrome die cast body w/ ABS plastic high impact insulators & split brass contacts



Description	Part Number Pollak	Fig.
Receptacle	11-410	A
Plug	11-409	B

#### 4-Way Mini Coils

- For adding circuits to tractor/trailer
- 4/14ga. (black, yellow, red, white)
- Temp rating: -40°F to 140°F



Part Number	Work Length
MINI-48	8ft.
MINI-410	10ft.
MINI-415	15ft.